


MACHINE SHOWN RUNS LH CASES

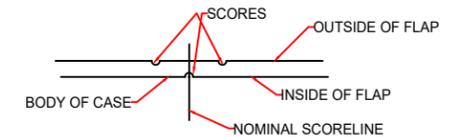

DOUBLE POINT SCORING
THE STYLE AND QUALITY OF SCORING CAN AFFECT THE OPERATION AND PERFORMANCE OF THE CE35-15G. PEARSON PACKAGING SYSTEMS RECOMMENDS THAT CASES WITH DOUBLE POINT SCORING BE USED (SEE SKETCH ABOVE) IN ORDER TO MAXIMIZE THE CONSISTENCY OF OPERATION OF YOUR MACHINE.

STANDARD RSC CORRUGATED SIZE RANGE

ERECTED CASE SIZE


CASE	LENGTH	WIDTH	DEPTH	OPEN DEPTH
MINIMUM	12.00	8.00	N/A	10.50*
MAXIMUM	30.00	24.00	N/A	30.00

*12.00 INCH MIN. WITH HIGH SPEED OPTION


KNOCKDOWN CASE SIZES (IN)

	KDL	KDW	FLAP
MINIMUM	20.00	14.00	4.00
MAXIMUM	50.00**	42.00	12.00

** SOME LENGTH / WIDTH COMBINATIONS MAY EXCEED STANDARD KD CASE LENGTH MAXIMUM.

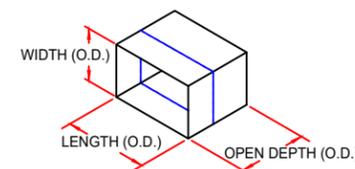

SET-UP CASE

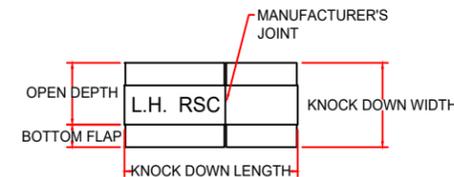

UTILITY REQUIREMENTS

AIR REQUIREMENTS : 2.87 SCF/CYCLE @ 80 PSI (0.081m³ PER CYCLE @ 551.2 KPa)
ELECTRICAL REQUIREMENTS : 460 VOLTS, 3 PHASE, 60 HZ STANDARD
FULL LOAD AMPS - 26.6 AMPS
DISCONNECT SIZE - 30 AMP

POWER REQUIREMENTS PROVIDED ARE FOR A BASE MACHINE AND CUSTOM OPTIONS MAY RESULT IN CHANGES.

MACHINE WEIGHT: APPROX. 5120 LBS. (2306 Kg.)

PRELIMINARY

(ALL DIMENSIONS ARE APPROXIMATE AND MAY VARY WITH FINAL DESIGN)

DATE	REVISION	EGN NO.	REV. BY	CHKD BY

2' - 2 7/16"
672
DIMENSIONS ARE IN FOOT FRACTION INCH OVER MILLIMETERS.

		<small>8120 WEST SUNSET HIGHWAY SPokane, WASHINGTON 99224 WWW.PEARSONPKS.COM</small>	
		TITLE CE35-15G LH CASE ERECTOR RH BASE MACHINE	
DR.	RP.	1/10/24	DWG NO.
CHK.			1062732
APP.			SCALE
			SHEET

PROPRIETARY
NEITHER THIS DOCUMENT NOR THE INFORMATION CONTAINED THEREIN MAY BE REPRODUCED OR DISCLOSED TO ANYONE WITHOUT THE WRITTEN PERMISSION OF R.A. PEARSON CO.