
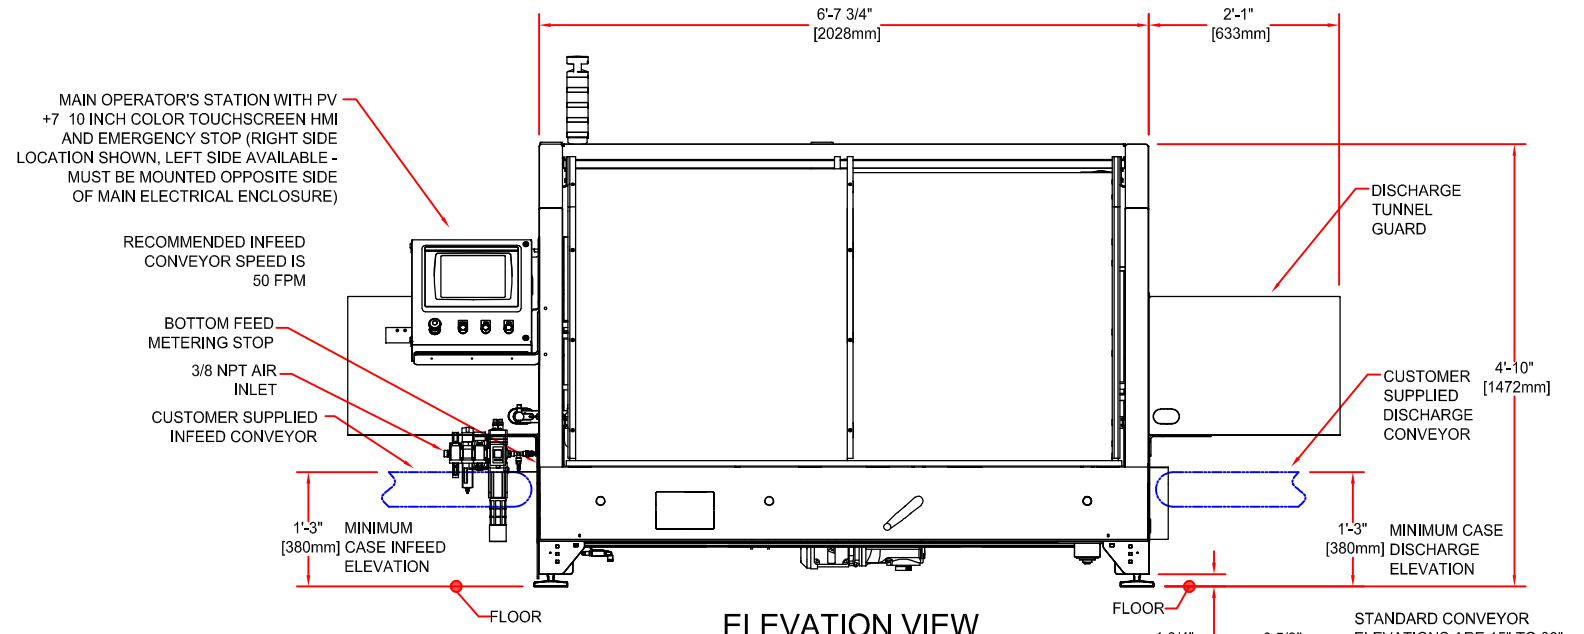


PLAN VIEW

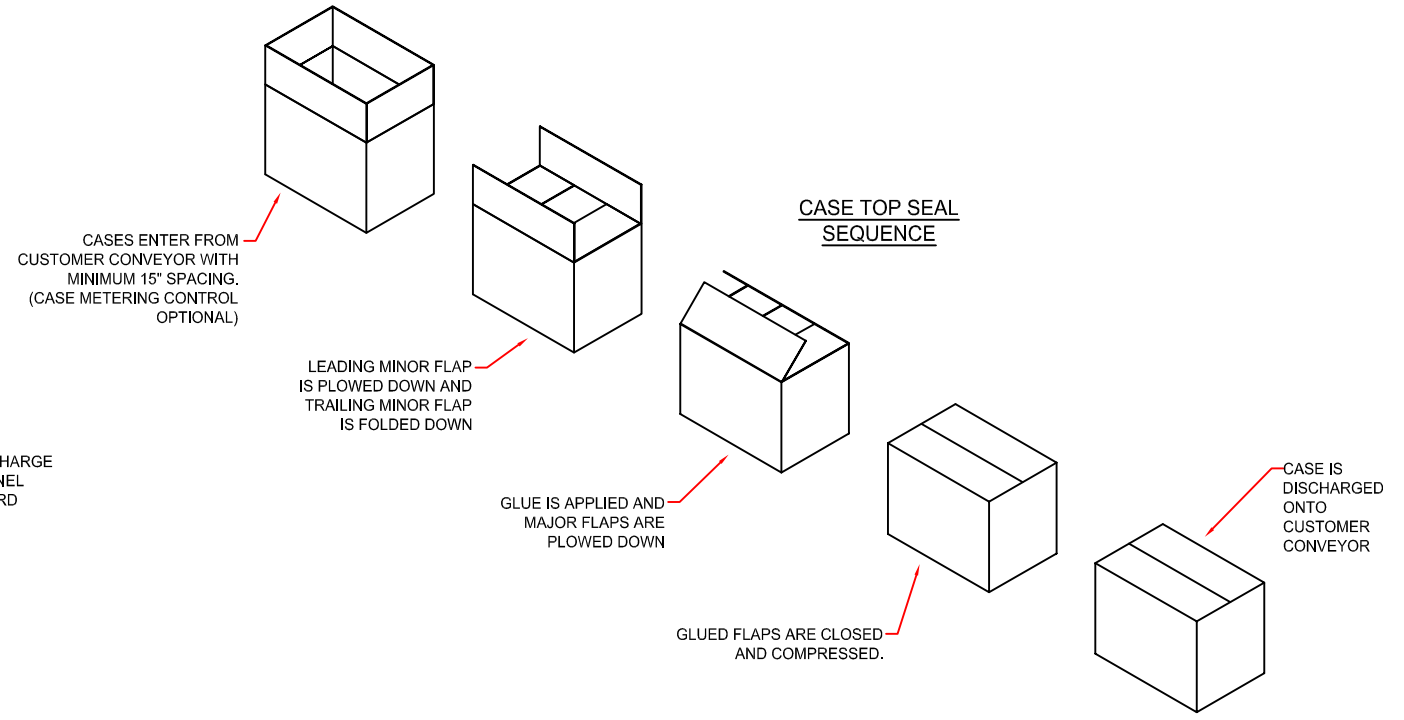

ELEVATION VIEW

STANDARD ADJUSTMENT RANGE		
	MINIMUM	MAXIMUM
LENGTH	8.0\"(204)	24.0\"(610)
WIDTH	5.0\"(127)	16.0\"(407)
DEPTH	4.75\"(121)	18.5\"(470)
OPEN DEPTH	7.0\"(178)	22.75\"(578)

UTILITY REQUIREMENTS

AIR REQUIREMENTS: 0.136 SCF/CYCLE @ 80 PSI (0.004m³ / CYCLE @ 551.2KPa)
 ELECTRICAL REQUIREMENTS: 460 V/3 PHASE/60 Hz STANDARD
 FULL LOAD AMPS - 16.0 AMPS
 DISCONNECT SIZE - 30 AMP

NOTE: UTILITIES INFO LISTED IS PRELIMINARY AND IS SUBJECT TO CHANGE WITH FINAL DESIGN

MACHINE WEIGHT (APPROXIMATE): 1,525 LBS (692 KG)

MACHINE SPEED: SEE ORDER SPECIFICATION FOR YOUR MACHINE SPEED

STANDARD CONVEYOR ELEVATIONS ARE 15\"/>

PROPRIETARY
 NEITHER THIS DOCUMENT NOR THE INFORMATION CONTAINED THEREIN MAY BE REPRODUCED OR DISCLOSED TO ANYONE WITHOUT THE WRITTEN PERMISSION OF R.A. PEARSON CO.

DATE	REVISION	EGN NO.	REV. BY	CHKD BY
12/21/20	UPDATED MACHINE FLA		ADT	
1/25/20	SHOW CHANGES MADE FOR STREAMLINE 30 DAY CONFIG		K.A.	
1/29/19	ADD DISCHARGE TUNNEL GUARD AS STD.		K.A.	
8/27/18	SHOW UP-DATED OPERATOR ENCLOSURE		K.A.	
3/25/18	UP-DATE ELECT UTILITY INFO		K.A.	
3/22/18	PV PLUS 10 WAS PV PLUS 7	-4	K.A.	
11/29/17	ADD OPTIONAL CONFIGURATION TEXT	-3	K.A.	
9/9/16	CHANGE CLOSED DEPTH FROM 4.5\"/>			
7/13/15	UP-DATE TO NEW MODEL NUMBER	-1	K.A.	
12/12/14	UP-DATE PNEUM. AIR CONSUMPTION CALCS & MACHINE WEIGHT		K.A.	
6/3/14	PV +6 7 INCH HMI WAS PV 400 HMI, SHOW OPT TUNNEL GUARD		K.A.	
3/28/14	SHOW NORDSON PROBLEUE 7 GLUE TANK IN PLACE OF MESA 9		K.A.	

PRELIMINARY

(ALL DIMENSIONS ARE APPROXIMATE AND MAY VARY WITH FINAL DESIGN)

2' - 2 7/16\"/>

DIMENSIONS ARE IN FOOT FRACTION INCH OVER MILLIMETERS.

PEARSON
 PACKAGING SYSTEMS
 6110 WEST SUNSET HIGHWAY
 SPOKANE, WASHINGTON 99224
 WWW.PEARSONPS.COM

TITLE
**CS25-42G CASE SEALER
 GLUE SEAL**

DR. K.A. 12/12/14
 CHK. D583764-4
 APP. SCALE SHEET