


**MACHINE SHOWN RUNS LH CASES**

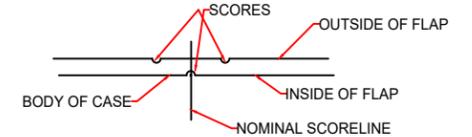

**DOUBLE POINT SCORING**  
 THE STYLE AND QUALITY OF SCORING CAN AFFECT THE OPERATION AND PERFORMANCE OF THE CE35-20T. PEARSON PACKAGING SYSTEMS RECOMMENDS THAT CASES WITH DOUBLE POINT SCORING BE USED (SEE SKETCH ABOVE) IN ORDER TO MAXIMIZE THE CONSISTENCY OF OPERATION OF YOUR MACHINE.

**UTILITY REQUIREMENTS**

AIR REQUIREMENTS : 1.51 SCF/CYCLE @ 80 PSI (0.043m<sup>3</sup> PER CYCLE @ 551.2 KPa)  
 ELECTRICAL REQUIREMENTS : 460 VOLTS, 3 PHASE, 60 Hz STANDARD  
 FULL LOAD AMPS - 15.7 AMPS  
 DISCONNECT SIZE - 30 AMP


**POWER REQUIREMENTS PROVIDED ARE FOR A BASE MACHINE AND CUSTOM OPTIONS MAY RESULT IN CHANGES.**

MACHINE WEIGHT: APPROX. 5120 LBS. (2306 Kg.)

**STANDARD RSC CORRUGATED SIZE RANGE**

ERECTED CASE SIZE				
CASE	LENGTH	WIDTH	DEPTH	OPEN DEPTH
MINIMUM	12.00	8.00	N/A	10.50*
MAXIMUM	30.00	24.00	N/A	30.00

\*12.00 INCH MIN. WITH HIGH SPEED OPTION

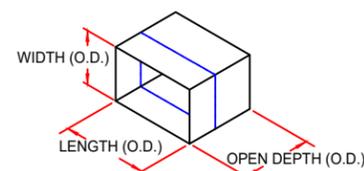


**SET-UP CASE**

**KNOCKDOWN CASE SIZES (IN)**

	KDL	KDW	FLAP
MINIMUM	20.00	14.00	4.00
MAXIMUM	50.00**	42.00	12.00

\*\* SOME LENGTH / WIDTH COMBINATIONS MAY EXCEED STANDARD KD CASE LENGTH MAXIMUM.

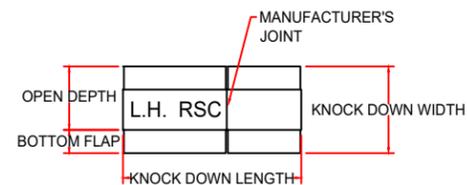

**PRELIMINARY**

(ALL DIMENSIONS ARE APPROXIMATE AND MAY VARY WITH FINAL DESIGN)

DATE	REVISION	EGN NO.	REV. BY	CHKD BY

2' - 2 7/16" 672

DIMENSIONS ARE IN FOOT FRACTION INCH OVER MILLIMETERS.

DR. RP		1/10/24	DWG NO.	
CHK.			1062748	
APP.			SCALE	SHEET

**PEARSON** PACKAGING SYSTEMS  
 8120 WEST SUNSET HIGHWAY  
 SPOKANE, WASHINGTON 99224  
 WWW.PEARSONPKS.COM

TITLE  
**CE35-20T LH CASE ERECTOR  
 RH BASE MACHINE**

PROPRIETARY  
 NEITHER THIS DOCUMENT NOR THE INFORMATION CONTAINED THEREIN MAY BE REPRODUCED OR DISCLOSED TO ANYONE WITHOUT THE WRITTEN PERMISSION OF R.A. PEARSON CO.