


STANDARD ERECTED CASE SIZE

CASE	LENGTH	WIDTH	DEPTH	OPEN DEPTH
MINIMUM	5.0"(127)	3.5"(89)	3.75"(95)	5.50"(140)
MAXIMUM	16.0"(406)	12.0"(305)	14.0"(356)	20.0"(508)

SEE ORDER SPECIFICATION DOCUMENT FOR SPECIFIC CUSTOMER CASE SIZES

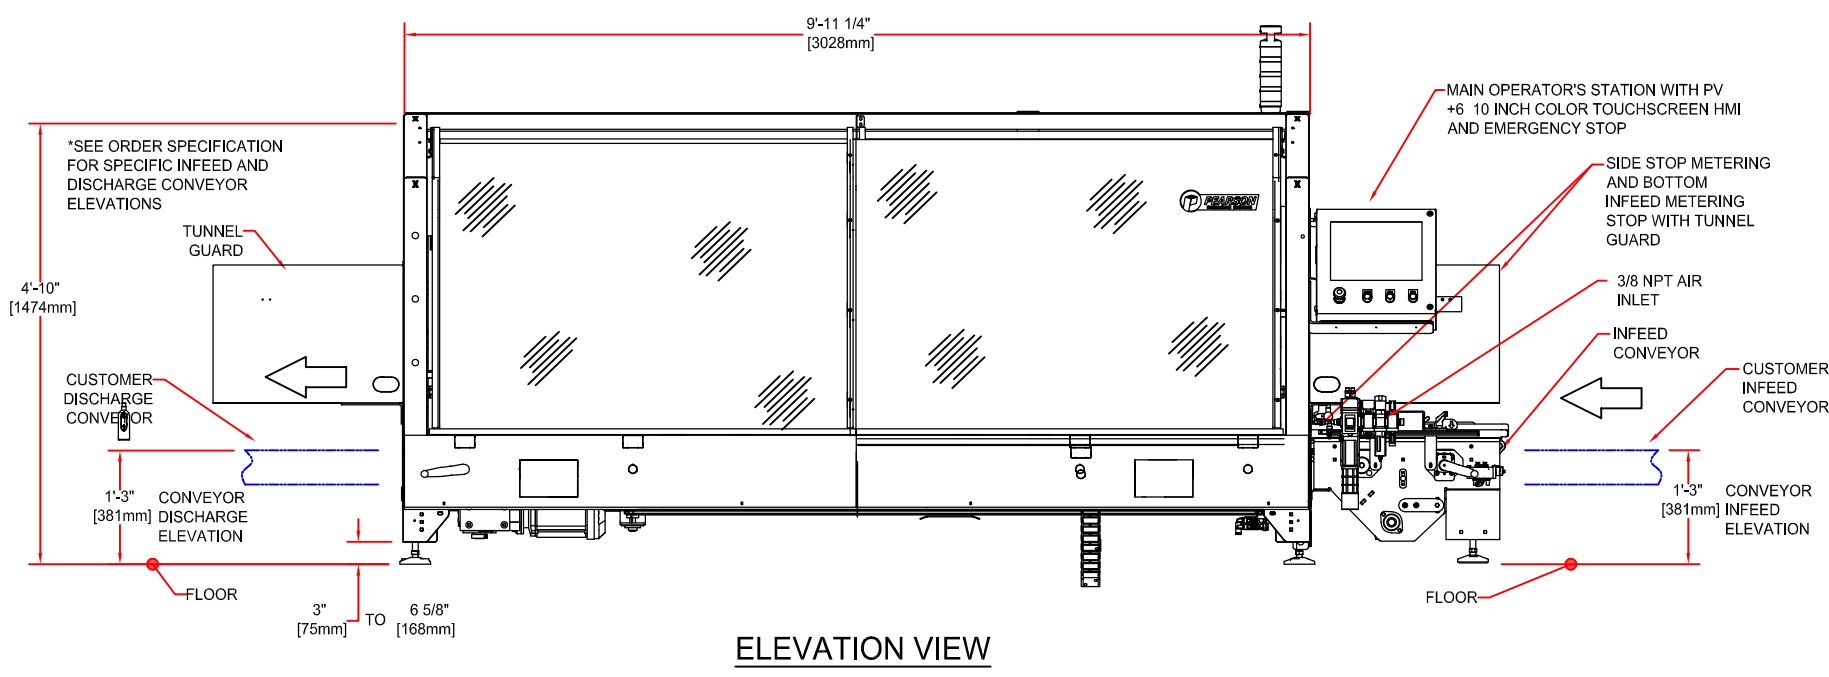

UTILITY REQUIREMENTS
 AIR REQUIREMENTS: 0.3140 SCF/CYCLE @ 80 PSI (0.0098m³/CYCLE @ 551.2 KPa)
 ELECTRICAL REQUIREMENTS: 460 V/3 PHASE/60 Hz STANDARD
 FULL LOAD AMPS - 31.3 AMPS
 DISCONNECT SIZE - 60 AMP
NOTE: UTILITIES INFO LISTED IS PRELIMINARY AND IS SUBJECT TO CHANGE WITH FINAL DESIGN
 MACHINE WEIGHT (APPROXIMATE): 650 Kg (1434 LBS.)
 MACHINE SPEED: SEE ORDER SPECIFICATION FOR MACHINE SPEED

PRELIMINARY
 (ALL DIMENSIONS ARE APPROXIMATE AND MAY VARY WITH FINAL DESIGN)

PROPRIETARY
 NEITHER THIS DOCUMENT NOR THE INFORMATION CONTAINED THEREIN MAY BE REPRODUCED OR DISCLOSED TO ANYONE WITHOUT THE WRITTEN PERMISSION OF R.A. PEARSON CO.

DATE	REVISION	EGN NO.	REV. BY	CHKD BY
12/21/20	UPDATED MACHINE FLA		ADT	
3/25/18	PV 1000 WAS 700, UP-DATE ELECT UTILITY		K.A.	
6/30/16	SHOW CALLOUT FOR SIDE STOP METERING	-2	K.A.	
2/4/16	SHOW DISCH TUNNEL GUARD, UP-DATE CLOSED & OPEN DEPTH MIN DIMS.	-1	K.A.	
9/19/14	SHOW CORRECT VIEW OF INFEED CONVEYOR		K.A.	
7/10/14	INFEED METERING STOP & TUNNEL GUARD ARE STANDARD		K.A.	
6/4/14	PV +6 7 INCH HMI WAS PV 400 HMI		K.A.	

2' - 2 7/16"
 672
 DIMENSIONS ARE IN FOOT FRACTION INCH OVER MILLIMETERS.

PEARSON
 PACKAGING SYSTEMS
 6110 WEST SUNSET HIGHWAY
 SPOKANE, WASHINGTON 99224
 WWW.PEARSONPS.COM

TITLE: **CS50-UG CASE TOP SEALER**

DR.	K.A.	12/20/13	DWG NO.	724950-2
CHK.				
APP.			SCALE	SHEET