



PLAN VIEW

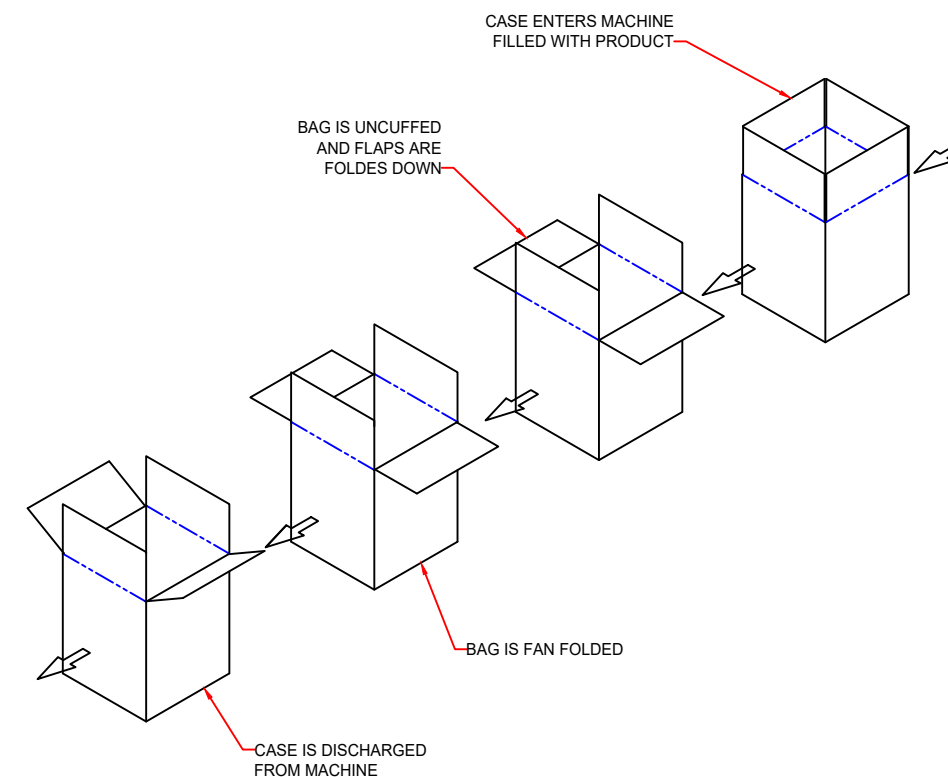

BAG UNCUFF AND FOLD SEQUENCE

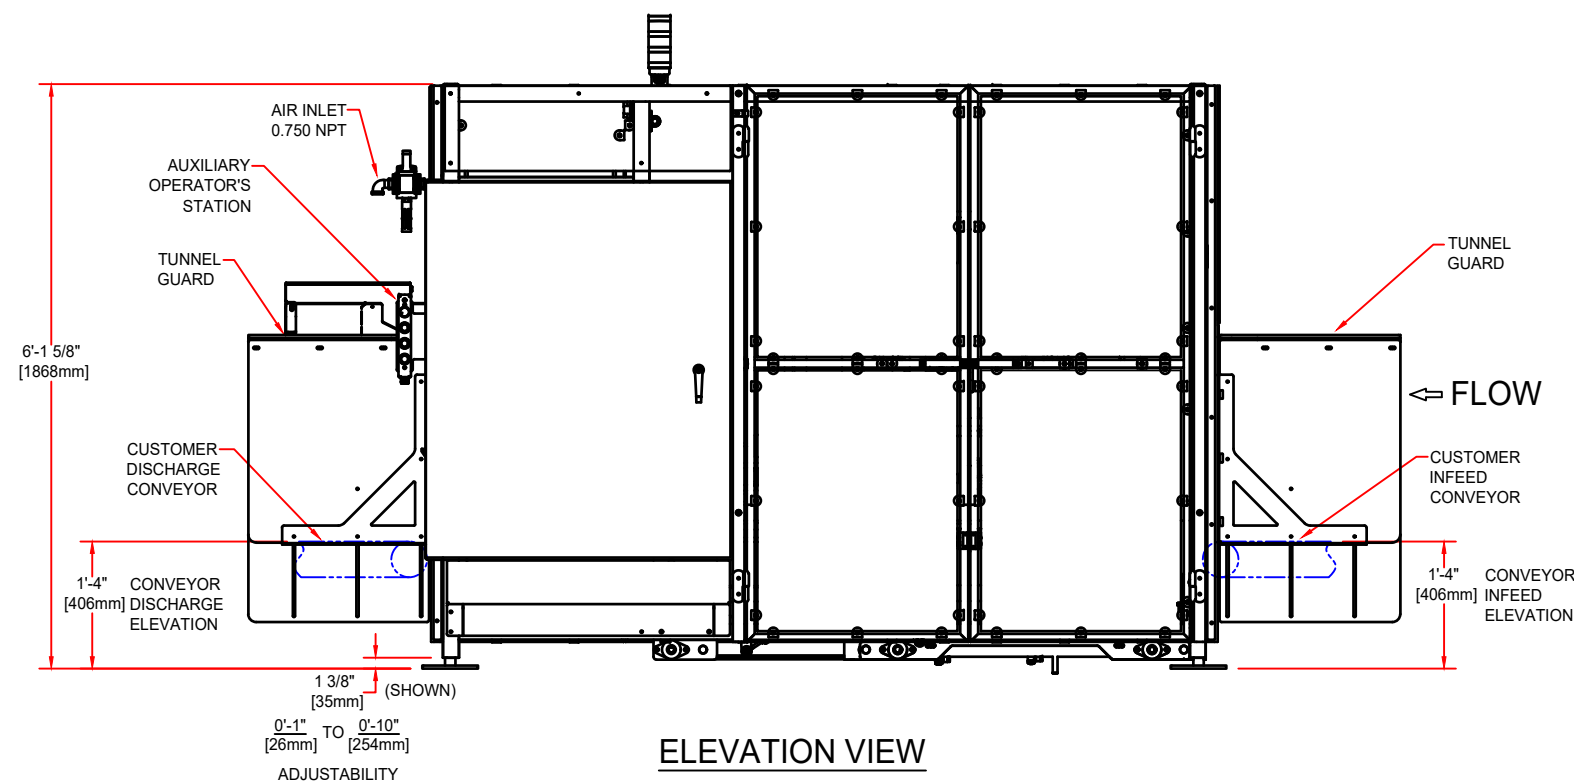

ELEVATION VIEW

UTILITY REQUIREMENTS

AIR REQUIREMENTS: 1.683 SCF/CYCLE @ 80 PSI (0.048 m³ PER CYCLE @ 551.2 KPa)
 ELECTRICAL REQUIREMENTS: 460 VOLTS, 3 PHASE, 60 Hz
 FULL LOAD AMPS - 3.0 AMPS
 DISCONNECT SIZE - 30 AMP

NOTE: UTILITIES INFO LISTED IS PRELIMINARY AND IS SUBJECT TO CHANGE WITH FINAL DESIGN

ESTIMATED MACHINE WEIGHT 2000 LBS. (900 KG)

SEE ORDER SPECIFICATIONS FOR SPECIFIC CUSTOMER MACHINE CONVEYOR ELEVATIONS.

ERECTED CASE SIZE

CASE	LENGTH	WIDTH	DEPTH	OPEN DEPTH
MINIMUM	9.5 (241mm)	6.5 (165mm)	4.75(121mm)	10.0 (254mm)
MAXIMUM	24.0 (610mm)	17.0 (432mm)	19.25(489mm)	24.0 (610mm)

DIMENSIONS ARE TO OUTSIDE OF ERECTED CASE
 MAXIMUM CASE RATE IS 15CPM

PRELIMINARY

(ALL DIMENSIONS ARE APPROXIMATE AND MAY VARY WITH FINAL DESIGN)

DATE	REVISION	ENG	JFK	CHKD BY	T.V.
1/12/24	UPDATE UTILITY REQUIREMENTS				T.V.
7/30/20	SHOW PHANTOMED ENCL AND OPRT ON OPPOSITE SIDE				K.A.
6/29/20	UP-DATED PER 30 DAY LEAD TIME CHANGES				K.A.
3/27/18	UP-DATE ELECTRICAL UTILITY INFO				K.A.
1/26/18	MAX LENGTH NOW 24 IN. (WAS 28 IN)				K.A.
1/9/18	PV PLUS 1000 HMI WAS PV PLUS 700 HMI				K.A.
9/19/14	DEPTH: 4.75 WAS 5.25 MIN, 19.25 WAS 15.5 MAX				K.A.
10/31/12	PV +6 7 INCH HMI WAS PV 400 HMI				K.A.
10/31/12	UP-DATE ELECT UTILITY INFO, PV 400 WAS 300				K.A.
10/2/09	ADDED STANDARD TUNNEL GUARD				K.A.
7/22/09	18.0" MAX CLOSED DEPTH WAS 15.5"				K.A.
11/5/08	DEPTH MIN WAS 4.75", MAX WAS 19.25"				K.A.
8/18/08	SHOWN 36X36 ENCLOSURE				K.A.
7/24/07	UPDATED MINIMUM CASE WIDTH TO 6.5(120mm)	ENG	JFK	KA	

29 1/4" [742.95mm]

DIMENSIONS ARE IN INCH & FRACTION INCH OVER MILLIMETERS.



TITLE UC15-F UNCUFFER "FAN FOLD"

DR.		DWG NO.	D262643
CHK.		SCALE	
APP.		SHEET	

PROPRIETARY
 NEITHER THIS DOCUMENT NOR THE INFORMATION CONTAINED THEREIN MAY BE REPRODUCED OR DISCLOSED TO ANYONE WITHOUT THE WRITTEN PERMISSION OF R.A. PEARSON CO.