



PLAN VIEW

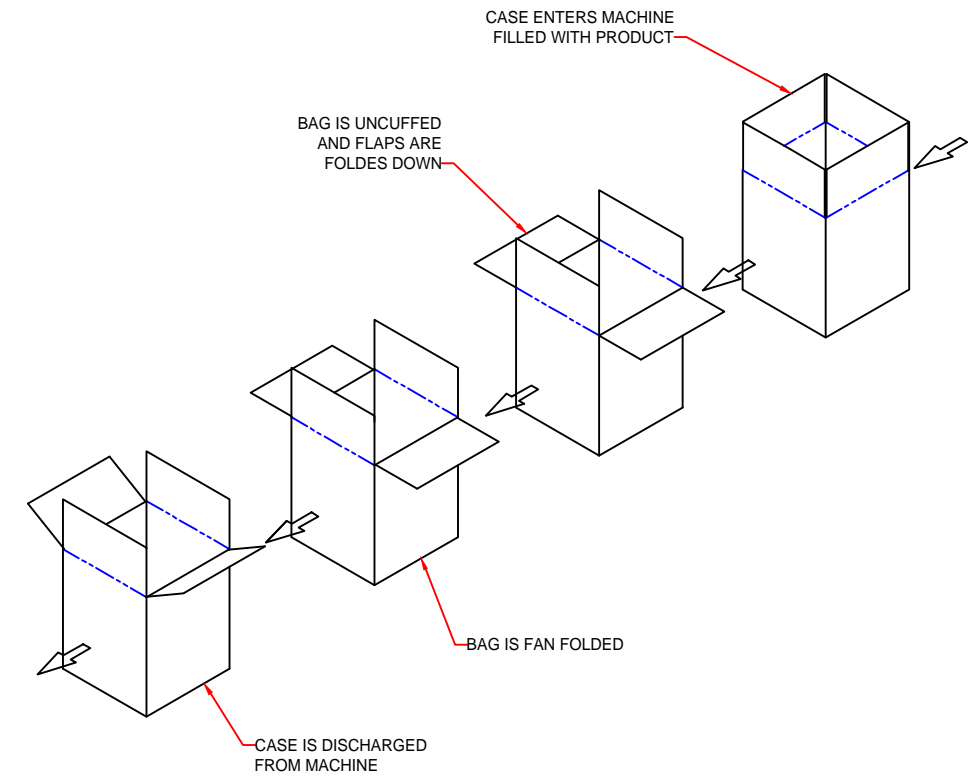

BAG UNCUFF AND FOLD SEQUENCE

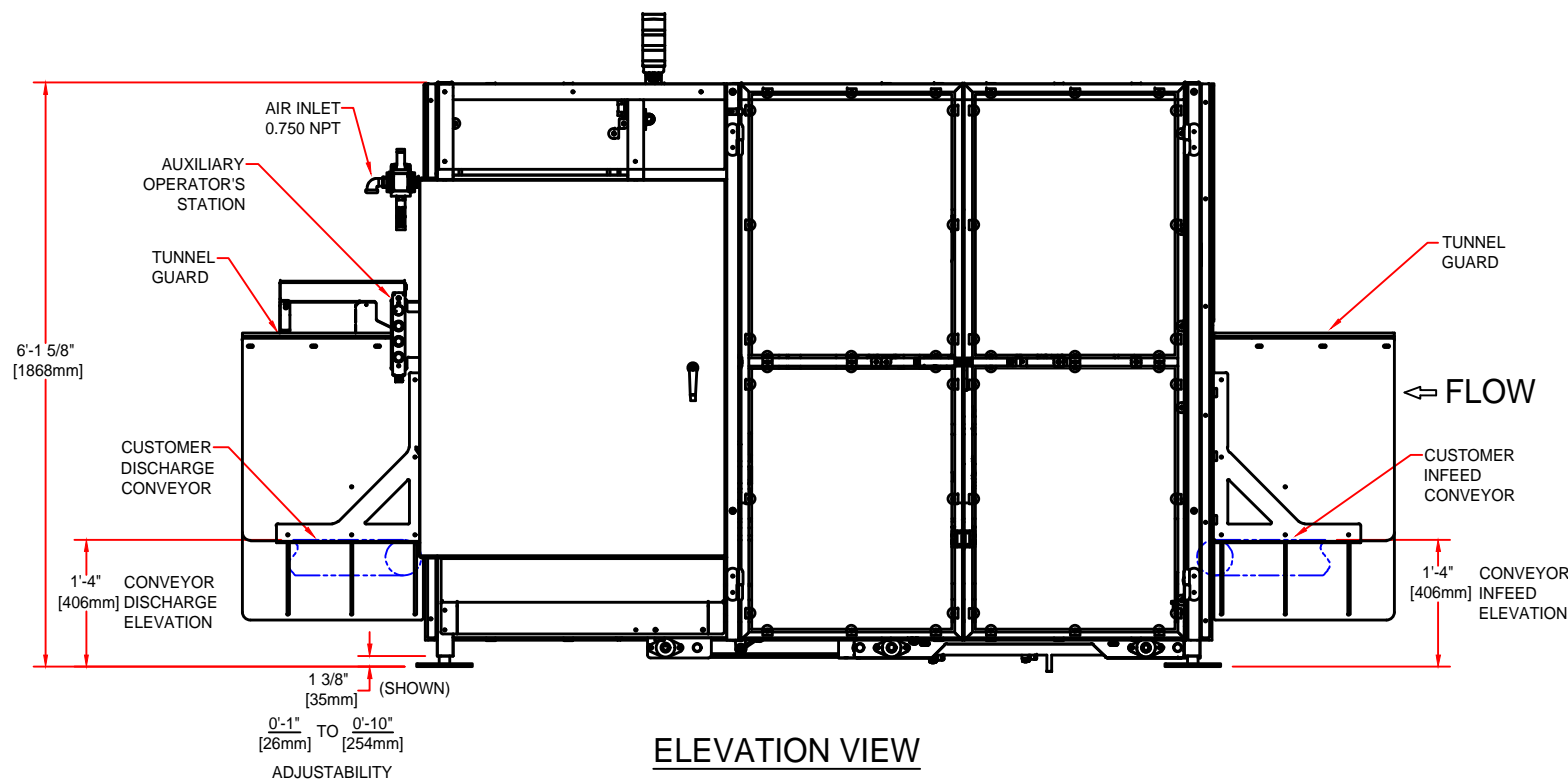

ELEVATION VIEW

UTILITY REQUIREMENTS

AIR REQUIREMENTS: 1.054 SCF/CYCLE @ 80 PSI (0.0299 m³ PER CYCLE @ 551.2 KPa)
ELECTRICAL REQUIREMENTS: 460 VOLTS, 3 PHASE, 60 Hz
FULL LOAD AMPS - 2.0 AMPS
DISCONNECT SIZE - 30 AMP

NOTE: UTILITIES INFO LISTED IS PRELIMINARY AND IS SUBJECT TO CHANGE WITH FINAL DESIGN

ESTIMATED MACHINE WEIGHT 2000 LBS. (900 KG)

SEE ORDER SPECIFICATIONS FOR SPECIFIC
CUSTOMER MACHINE CONVEYOR ELEVATIONS.

ERECTED CASE SIZE

CASE	LENGTH	WIDTH	DEPTH	OPEN DEPTH
MINIMUM	9.5 (241mm)	6.5 (165mm)	4.75(121mm)	10.0 (254mm)
MAXIMUM	24.0 (610mm)	17.0 (432mm)	19.25(489mm)	24.0 (610mm)

DIMENSIONS ARE TO OUTSIDE OF ERECTED CASE
MAXIMUM CASE RATE IS 15CPM

PRELIMINARY

(ALL DIMENSIONS ARE APPROXIMATE
AND MAY VARY WITH FINAL DESIGN)

6/29/20	UP-DATED PER 30 DAY LEAD TIME CHANGES		K.A.	
3/27/18	UP-DATE ELECTRICAL UTILITY INFO		K.A.	
1/26/18	MAX LENGTH NOW 24 IN. (WAS 28 IN)		K.A.	
1/9/18	PV PLUS 1000 HMI WAS PV PLUS 700 HMI		K.A.	
9/19/14	DEPTH: 4.75 WAS 5.25 MIN, 19.25 WAS 15.5 MAX		K.A.	
10/31/12	PV +6 7 INCH HMI WAS PV 400 HMI		K.A.	
10/31/12	UP-DATE ELECT UTILITY INFO, PV 400 WAS 300		K.A.	
10/2/09	ADDED STANDARD TUNNEL GUARD		K.A.	
7/22/09	18.0" MAX CLOSED DEPTH WAS 15.5"		K.A.	
11/5/08	DEPTH MIN WAS 4.75", MAX WAS 19.25"		K.A.	
8/18/08	SHOWN 36X36 ENCLOSURE		K.A.	
7/24/07	UPDATED MINIMUM CASE WIDTH TO 6.5(120mm)	ENG	JFK	KA
DATE	REVISION	ENG	REV	CHKD BY

29 1/4" [742.95mm]

DIMENSIONS ARE IN
INCH & FRACTION INCH
OVER MILLIMETERS.



5120 WEST SUNSET HIGHWAY
SPOKANE, WASHINGTON 99224
WWW.PEARSONPKG.COM

TITLE
UC15-F UNCUFFER "FAN FOLD"

DR. CHK. APP. DWG NO. D262643 SCALE SHEET

PROPRIETARY
NEITHER THIS DOCUMENT NOR THE
INFORMATION CONTAINED THEREIN
MAY BE REPRODUCED OR DISCLOSED
TO ANYONE WITHOUT THE WRITTEN
PERMISSION OF R.A. PEARSON CO.