

ERECTED CASE SIZE




CASE	LENGTH	WIDTH	DEPTH	OPEN DEPTH
MINIMUM	9.5 (241mm)	9.5 (241mm)	N/A	10.0 (254mm)
MAXIMUM	24.0 (610mm)	17.0 (432mm)	N/A	24.0 (610mm)

GENERAL BAG INFORMATION
 BAG ROLL: CORE I.D. - 3"
 MAX O.D. - 14"
 MAX WIDTH - 32"
 FILM THICKNESS - 1.25 MIL MIN TO 4.0 MIL MAX

UTILITY REQUIREMENTS W/O SEAL & CUT OPTION
 REQUIREMENTS: 0.26 SCF/CYCLE @ 80 PSI (0.007m³ PER CYCLE @ 551.2 KPa)
 ELECTRICAL REQUIREMENTS: 460 VOLTS, 3 PHASE, 60 Hz
 FULL LOAD AMPS - 38.0 AMPS
 DISCONNECT SIZE - 60 AMPS

POWER REQUIREMENTS PROVIDED ARE FOR A BASE MACHINE AND CUSTOM OPTIONS MAY RESULT IN CHANGES.

ESTIMATED MACHINE WEIGHT: 3200 LBS. (1452 KG)
 MACHINE SPEED: SEE ORDER SPECIFICATIONS

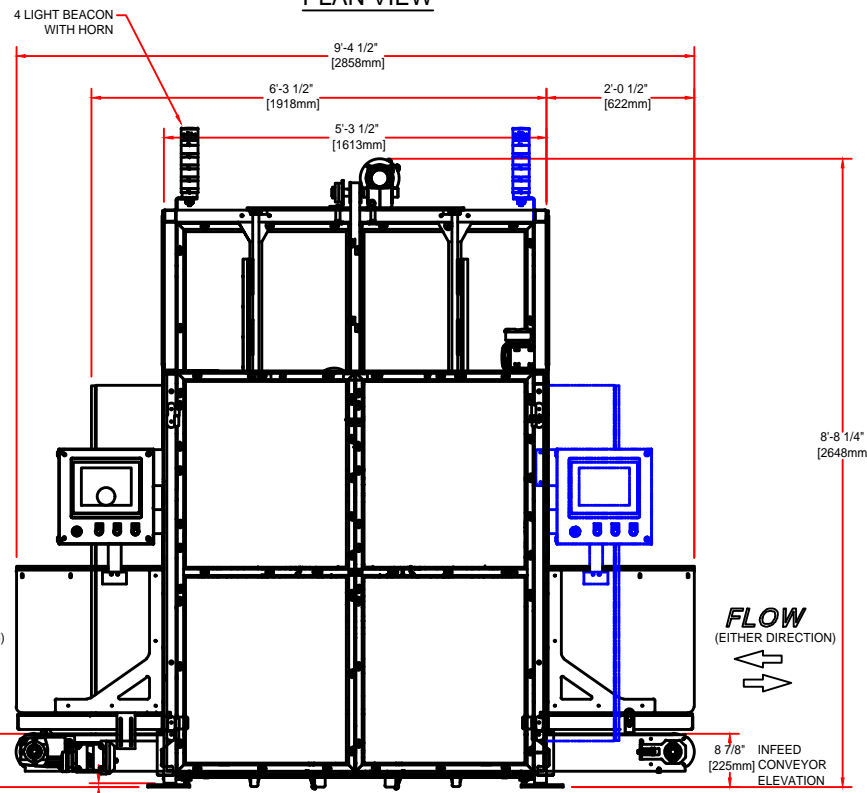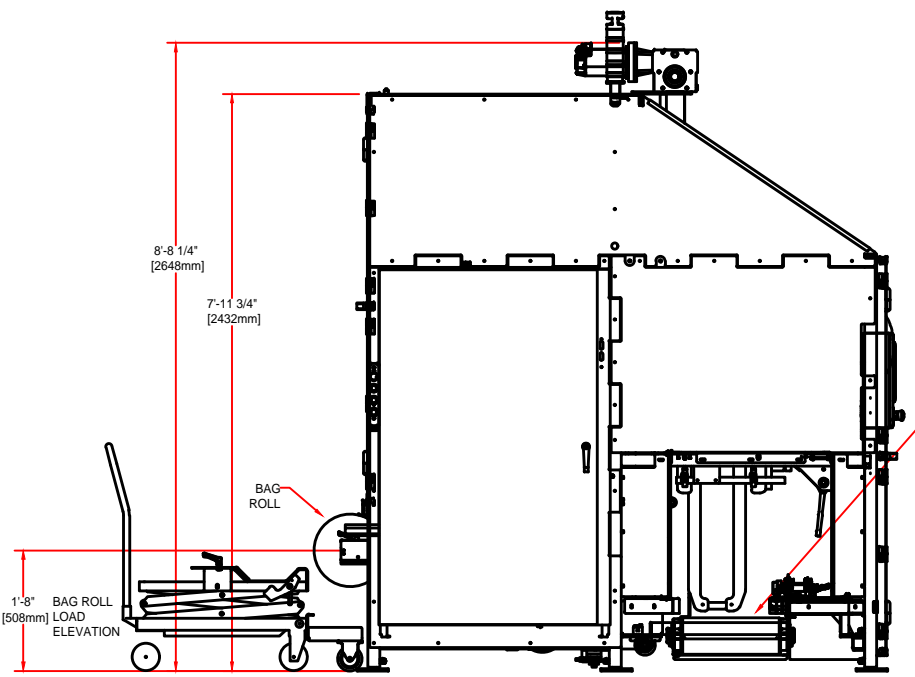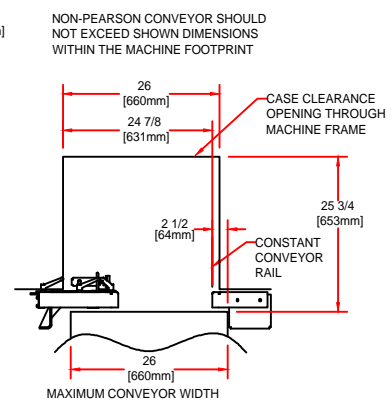

PRELIMINARY
 (ALL DIMENSIONS ARE APPROXIMATE AND MAY VARY WITH FINAL DESIGN)

STANDARD CONVEYOR ELEVATIONS ARE 8.75\"/>

PROPRIETARY
 NEITHER THIS DOCUMENT NOR THE INFORMATION CONTAINED THEREIN MAY BE REPRODUCED OR DISCLOSED TO ANYONE WITHOUT THE WRITTEN PERMISSION OF R.A. PEARSON CO.

DATE	REVISION	ECN NO.	REV. BY	CHKD BY
3/6/18	UP-DATE ELEC UTILITY INFO, PV 1000 WAS 700			K.A.
4/14/20	LEFT AND RIGHT SIDE NOW DETERMINED AS YOU FACE THE CONVEYOR/HMI SIDE OF MACHINE			K.A.
6/3/14	PV +6 7 INCH WAS PV 600 HMI			K.A.
2/3/14	UP-DATED VIEWS FROM CURRENT 3D MODEL			K.A.
9/6/12	UP-DATED ELECT UTILITY INFO.			K.A.

2' - 2 7/16"		TITLE	
672		BI25 BAG INSERTER	
DIMENSIONS ARE IN FOOT FRACTION INCH OVER MILLIMETERS.		DR.	DWG NO.
CHK.		APP.	D517605
SCALE		SHEET	

