

**DOUBLE POINT SCORING**  
 THE STYLE AND QUALITY OF SCORING CAN EFFECT THE OPERATION AND PERFORMANCE OF THE CE35-15G. PEARSON PACKAGING SYSTEMS RECOMMENDS THAT CASES WITH DOUBLE POINT SCORING BE USED. (SEE SKETCH ABOVE) IN ORDER TO MAXIMIZE THE CONSISTENCY OF OPERATION OF YOUR MACHINE.


**MACHINE SHOWN RUNS RH CASES**

**UTILITY REQUIREMENTS**

AIR REQUIREMENTS : 3.11 SCF/CYCLE @ 80 PSI (0.088m<sup>3</sup> PER CYCLE @ 551.2 KPa)  
 ELECTRICAL REQUIREMENTS : 230/460 VOLTS, 3 PHASE, 60 Hz STANDARD  
 FULL LOAD AMPS - 27.2 AMPS @ 460V  
 DISCONNECT SIZE - 30 AMP  
 MACHINE WEIGHT: APPROX. 5120 LBS. (2306 Kg.)

**SPEED CAPACITY**

SEE BORCHURE OR ORDER SPECIFICATION DOCUMENT FOR MACHINE SPEED

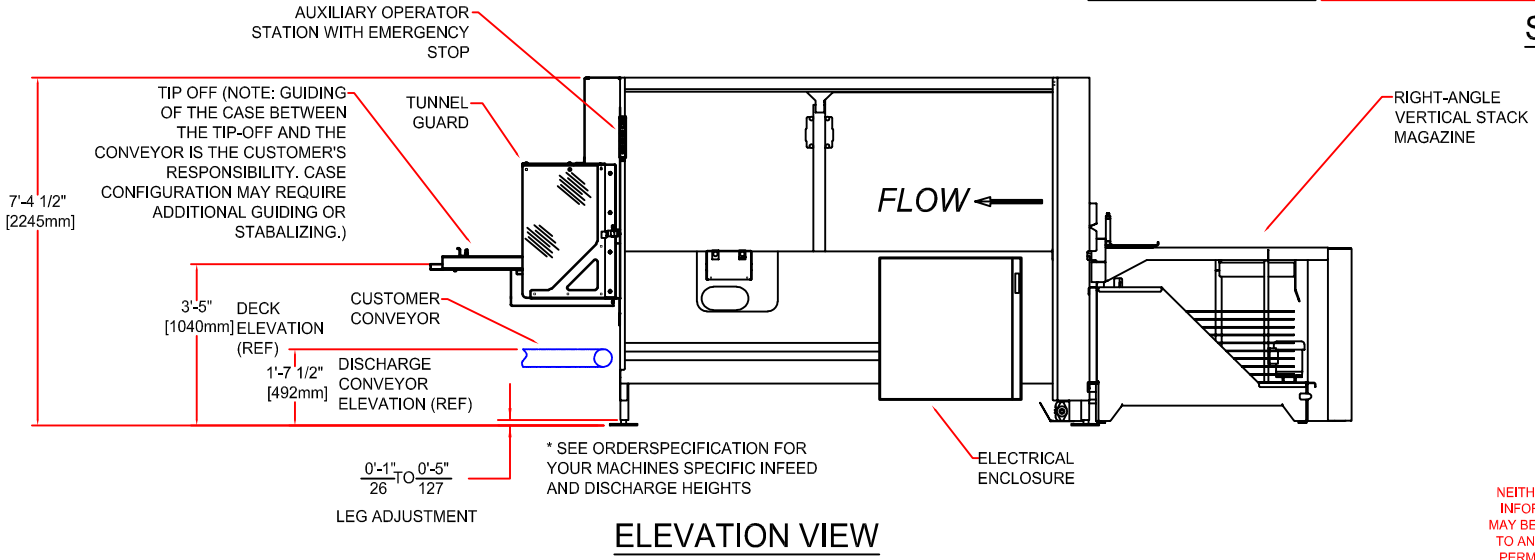


**STANDARD RSC CORRUGATED SIZE RANGE ERECTED CASE SIZE**

CASE	LENGTH	WIDTH	DEPTH	OPEN DEPTH
MINIMUM	12.00	8.00	N/A	10.00
MAXIMUM	30.00	24.00	N/A	30.00

**KNOCKDOWN CASE SIZES (IN)**

	KDL	KDW	FLAP
MINIMUM	20.00	14.00	4.00
MAXIMUM	50.00**	42.00	12.00

\*\* SOME LENGTH / WIDTH COMBINATIONS MAY EXCEED STANDARD KD CASE LENGTH MAXIMUM.

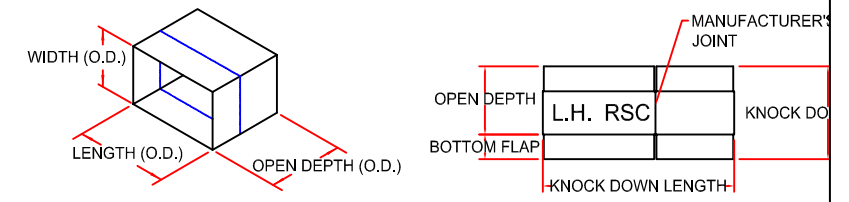

**SET-UP CASE**

**KNOCK-DOWN CASE**

**PRELIMINARY**

(ALL DIMENSIONS ARE APPROXIMATE AND MAY VARY WITH FINAL DESIGN)

PROPRIETARY  
 NEITHER THIS DOCUMENT NOR THE INFORMATION CONTAINED THEREIN MAY BE REPRODUCED OR DISCLOSED TO ANYONE WITHOUT THE WRITTEN PERMISSION OF R.A. PEARSON CO.

DATE	REVISION	REV. NO.	REV. BY	CHKD BY
12/10/20	DEL'D REF TO HIGH SPEED OPT-NOT OFFERED		BGP	
12/10/20	UPDATED UTILITIES.		BGP	

2' - 2 7/16" 672

DIMENSIONS ARE IN FOOT FRACTION INCH OVER MILLIMETERS.

**PEARSON** PACKAGING SYSTEMS  
 5130 WEST SUNSET HIGHWAY  
 SPOKANE, WASHINGTON 99224  
 WWW.PEARSONPKG.COM

TITLE: CE35-15G CASE ERECTOR (LH CASE) RIGHT ANGLE VERTICAL STACK MAGAZINE

DR. K.A. 8/4/20 DWG NO. 1030873R

CHK. APP. SCALE SHEET