

STANDARD RSC CORRUGATED SIZE RANGE

ERECTED CASE SIZE

CASE	LENGTH	WIDTH	DEPTH	OPEN DEPTH
MINIMUM	12.00	8.00	N/A	10.50
MAXIMUM	30.00	24.00	N/A	30.00

KNOCKDOWN CASE SIZES (IN)

KDL	KDW	FLAP
MINIMUM	20.00	4.00
MAXIMUM	50.00**	12.00


** SOME LENGTH / WIDTH COMBINATIONS MAY EXCEED STANDARD KD CASE LENGTH MAXIMUM.

PRELIMINARY

(ALL DIMENSIONS ARE APPROXIMATE AND MAY VARY WITH FINAL DESIGN)

DATE	REVISION	REV. NO.	BY	CHKD	APP'D
1/3/24	INCREASED MINIMUM OPEN DEPTH TO 10.50"		RP		
12/10/20	DELD REF TO HIGH SPEED OPT-NOT OFFERED		BGP		
12/10/20	UPDATED UTILITIES.		BGP		

2' - 2 7/16'	672
DIMENSIONS ARE IN FOOT FRACTION INCH OVER MILLIMETERS.	
DWG NO. 1030873	SCALE
TITLE	SHEET

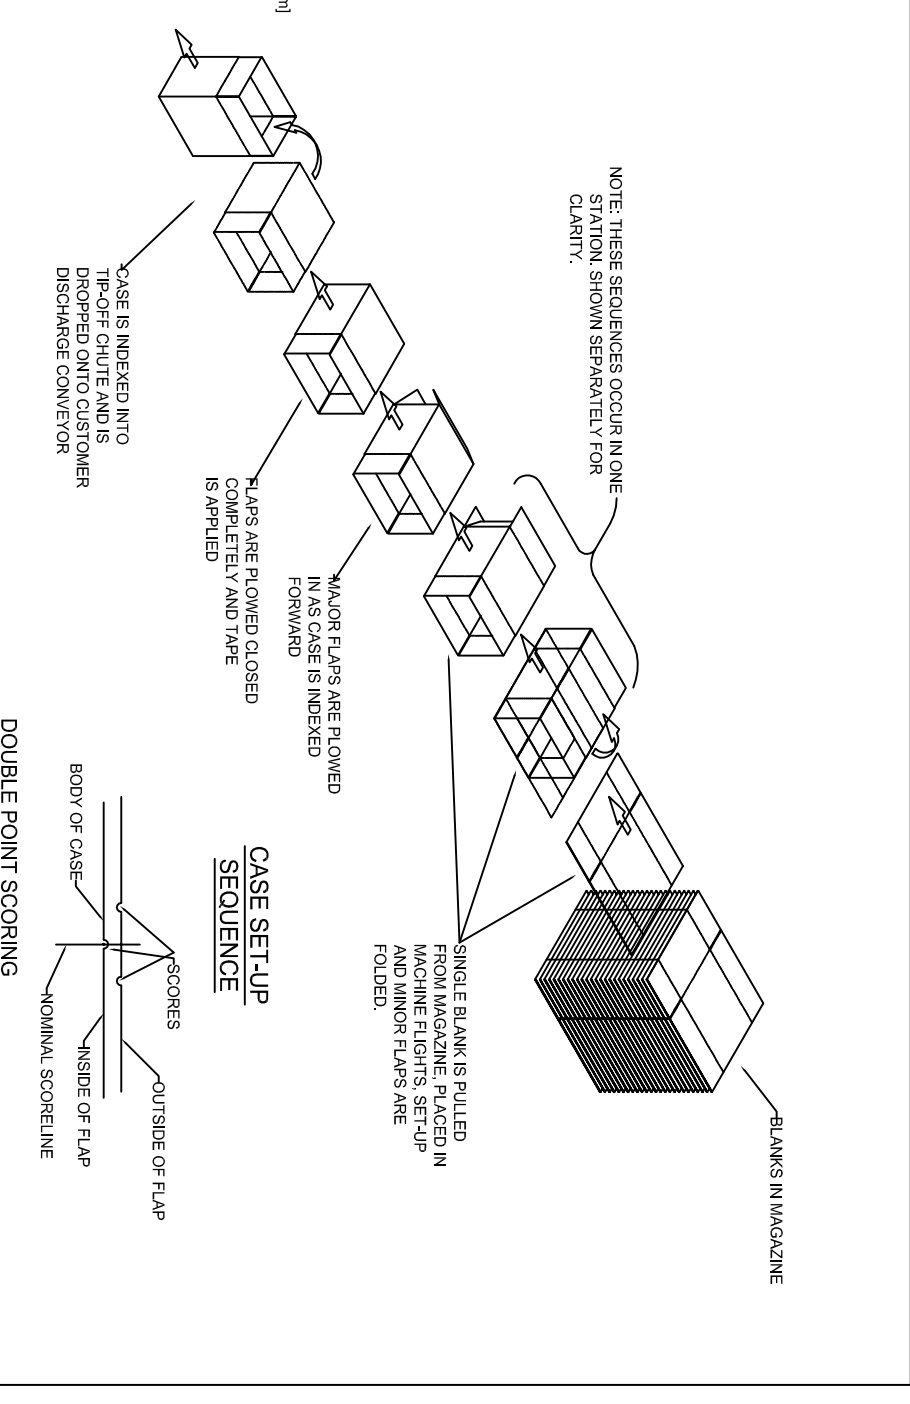

MACHINE SHOWN RUNS LH CASES

UTILITY REQUIREMENTS


AIR REQUIREMENTS: 3.11 SCF/CYCLE @ 80 PSI (0.088m³/PER CYCLE @ 551.2 KPa)
 ELECTRICAL REQUIREMENTS: 230/460 VOLTS, 3 PHASE, 60 Hz STANDARD
 FULL LOAD AMPS - 27.2 AMPS @ 460V
 DISCONNECT SIZE - 30 AMP
 MACHINE WEIGHT: APPROX. 5120 LBS. (2306 Kg.)

SPEED CAPACITY

SEE BORCHURE OR ORDER SPECIFICATION DOCUMENT FOR MACHINE SPEED

DOUBLE POINT SCORING

THE STYLE AND QUALITY OF SCORING CAN AFFECT THE OPERATION AND PERFORMANCE OF THE CE35-15G. PEARSON PACKAGING SYSTEMS RECOMMENDS THAT CASES WITH DOUBLE POINT SCORING BE USED. (SEE SKETCH ABOVE) IN ORDER TO MAXIMIZE THE CONSISTENCY OF OPERATION OF YOUR MACHINE.

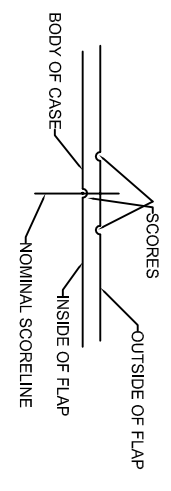

CASE SET-UP SEQUENCE



NEITHER THIS DOCUMENT NOR THE INFORMATION CONTAINED THEREIN MAY BE REPRODUCED OR DISCLOSED TO ANYONE WITHOUT THE WRITTEN PERMISSION OF R.A. PEARSON CO.

PROPRIETARY



CE35-15G CASE ERECTOR (LH CASE) RIGHT ANGLE VERTICAL STACK MAGAZINE

4100 EAST STREET, HILBERT, MN 55032
 TEL: 763-885-2222
 WWW.PEARSON.COM