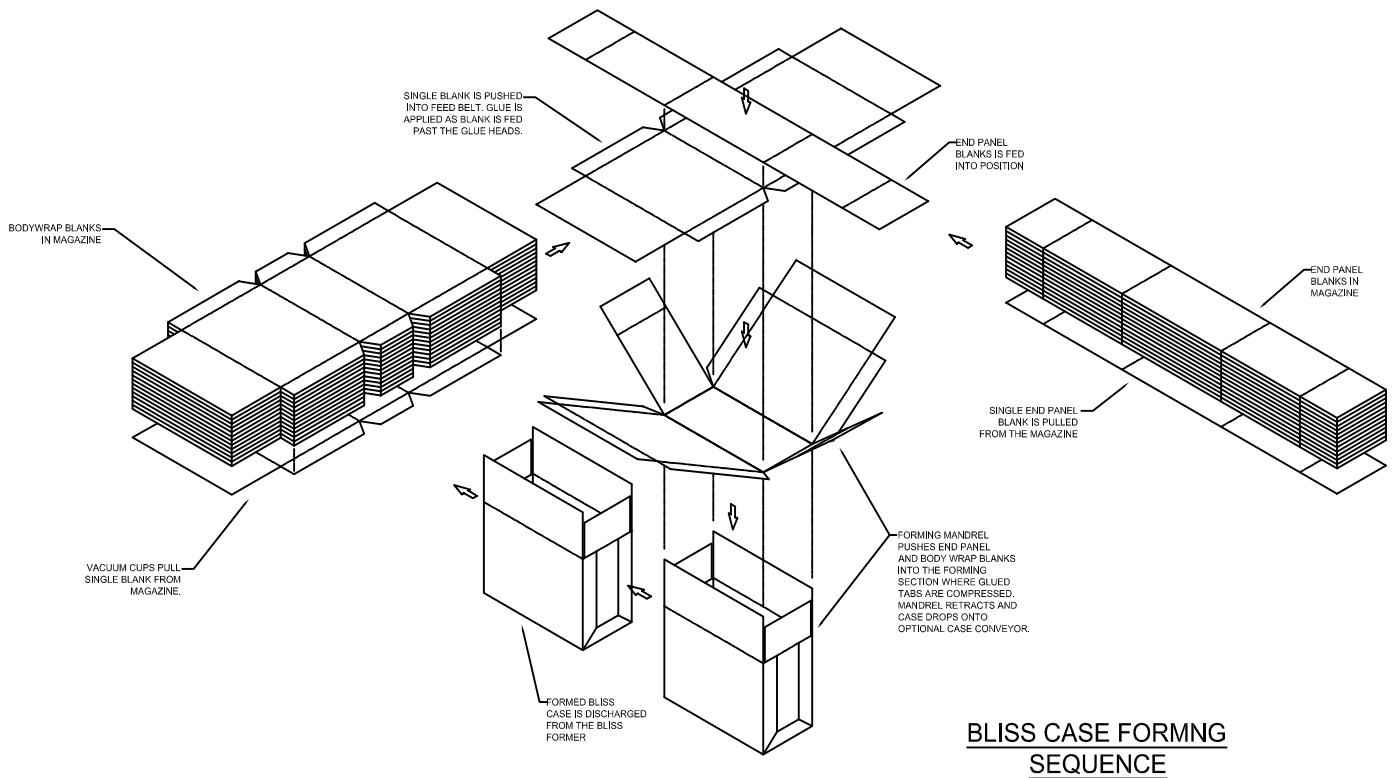

BLISS CASE FORMNG SEQUENCE

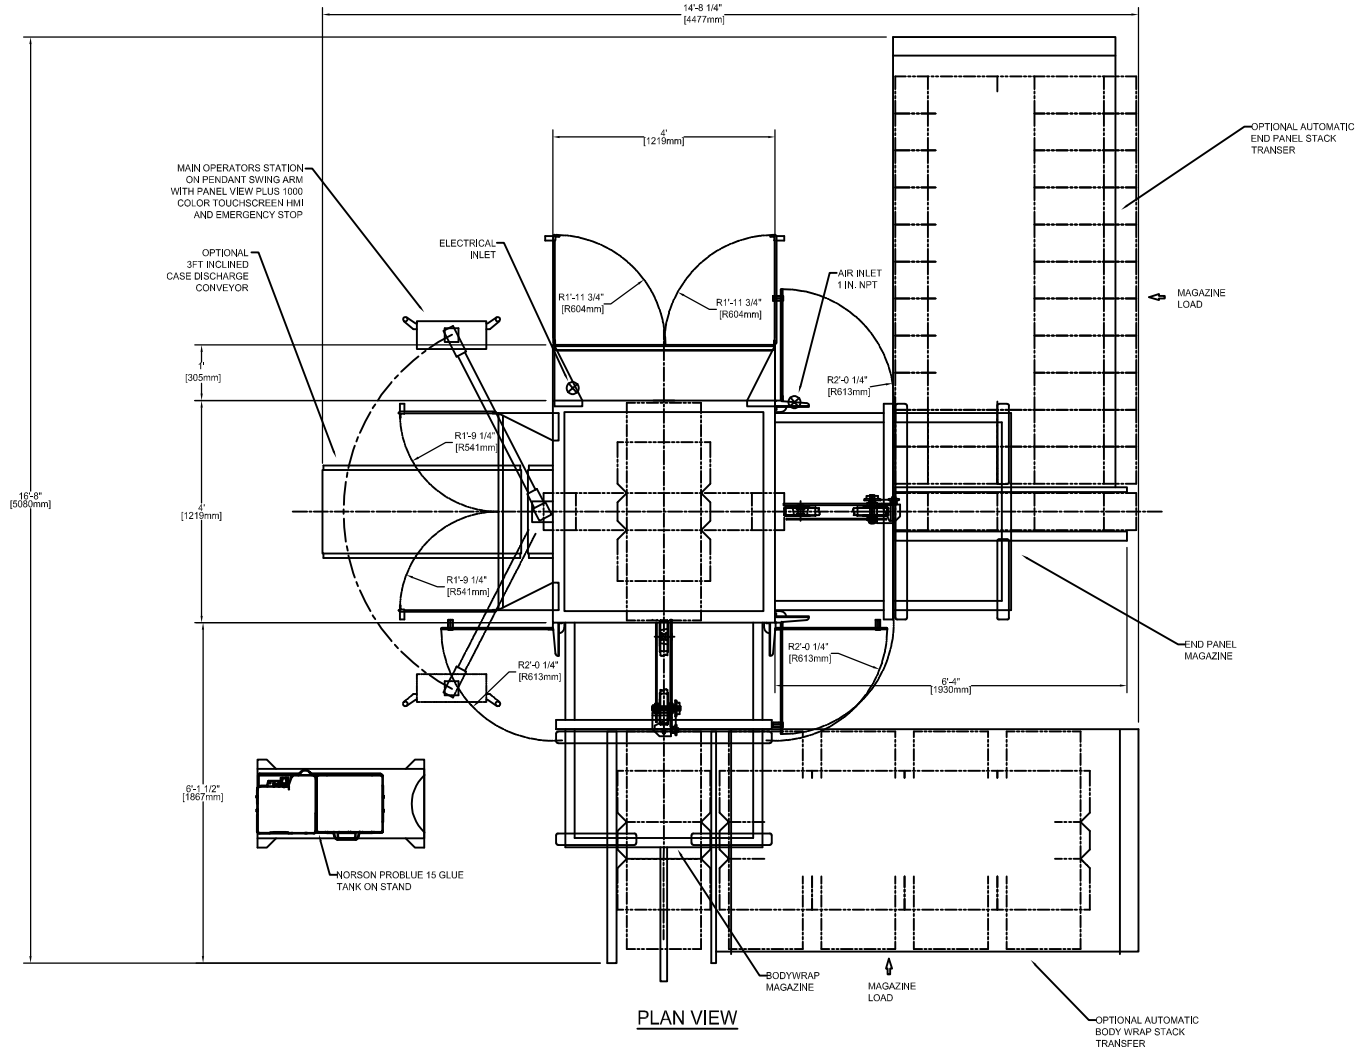

PLAN VIEW

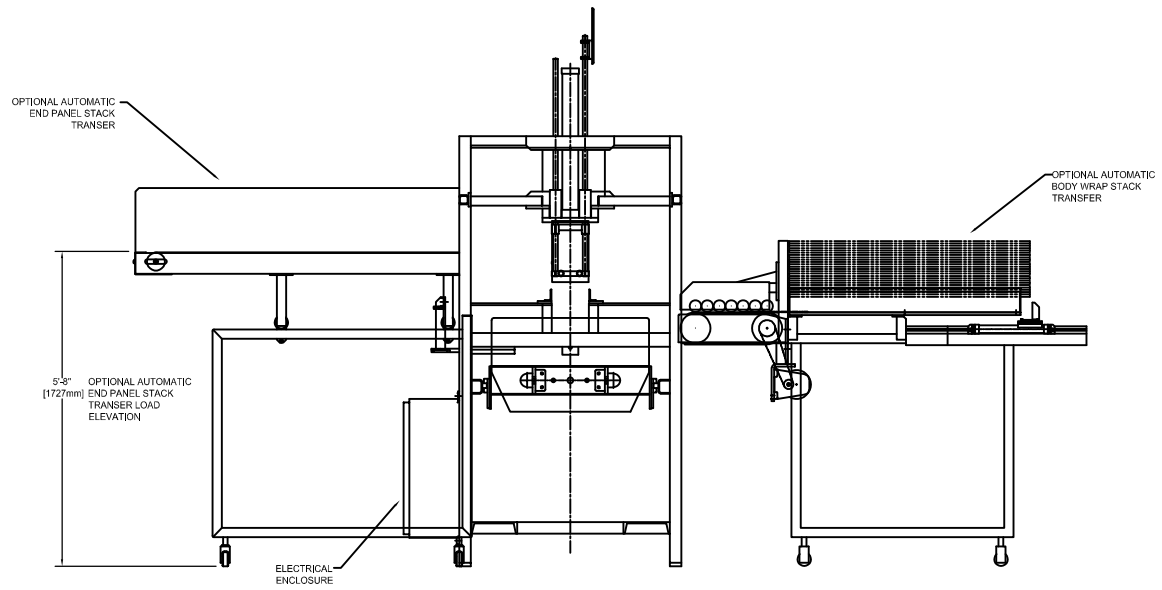

END VIEW

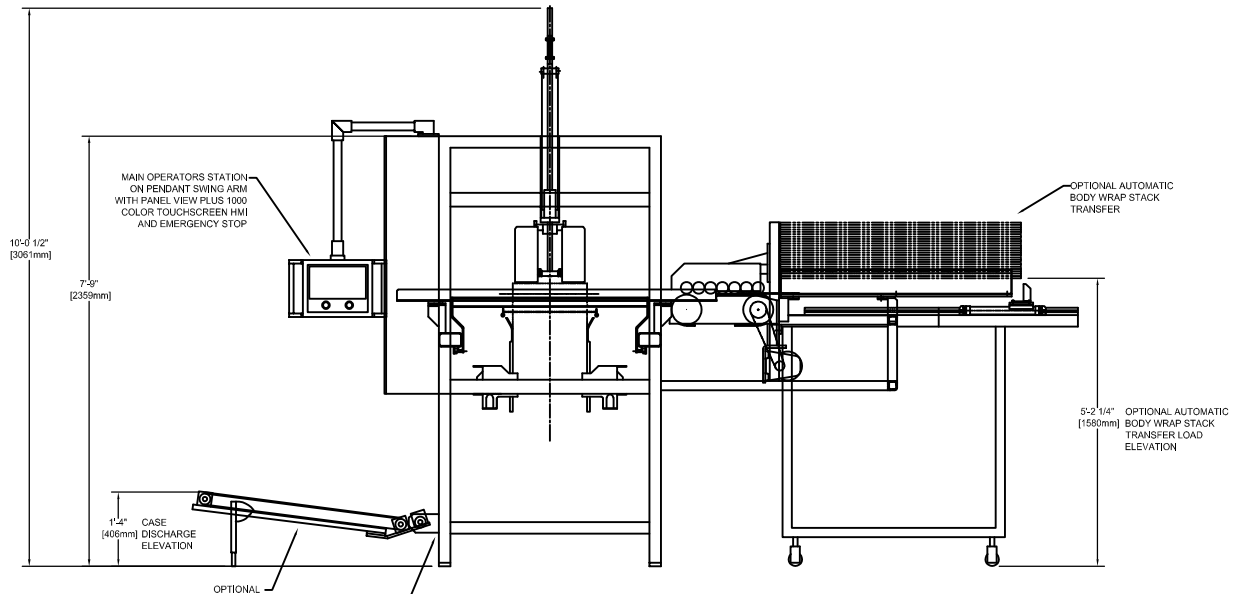

ELEVATION VIEW



FORMED CASE SIZE

STANDARD FORMED CASE RANGE		
	MINIMUM	MAXIMUM
LENGTH	8.0"(203)	25.0"(635)
WIDTH	8.0"(203)	12.0"(305)
DEPTH W/O FLAPS	4.0"(102)	14.0"(356)
DEPTH W/ FLAPS	4.0"(102)	20.0"(508)

UTILITY REQUIREMENTS

AIR REQUIREMENTS: 3.59 SCFICYCLE @ 80 PSI (0.102 m³/CYCLE @ 551.2 KPa)
ELECTRICAL REQUIRMENTS: 460 V/3 PHASE/60 Hz STANDARD
FULL LOAD AMPS - 20.0 AMPS
DISCONNECT SIZE - 30 AMP

POWER REQUIREMENTS PROVIDED ARE FOR A BASE MACHINE AND CUSTOM OPTIONS MAY RESULT IN CHANGES.

MACHINE WEIGHT (APPROXIMATE:)_____5,200 LBS. (2356 Kg) (BASE MACHINE ONLY)

MACHINE SPEED: SEE ORDER SPECIFICATION

PRELIMINARY

(ALL DIMENSIONS ARE APPROXIMATE AND MAY VARY WITH FINAL DESIGN)

==========
PROPRIETARY
NEITHER THIS DOCUMENT NOR THE INFORMATION CONTAINED THERIN MAY BE REPRODUCED OR DISCLOSED TO ANYONE WITHOUT THE WRITTEN PERMISSION OF R.A. PEARSON CO.

DATE	REVISION	REV NO.	REV. BY	CHKD BY
3/25/18	PV 1000 WAS 700, UP-DATE ELEC UTILITY INFO		K.A..	
12/8/16	SHOW DISCHARGE CONVEYORS AS OPTIONAL		K.A.	

2' - 2 7/16"
672

DIMENSIONS ARE IN FOOT FRACTION INCH OVER MILLIMETERS.

PEARSON PACKAGING SYSTEMS
8130 WEST SUNSET HIGHWAY
SPOKANE, WASHINGTON 99224
WWW.PEARSONPKG.COM

TITLE: BF30-2PB BLISS FORMER

DR.	K.A.	4/22/16	DWG NO. 771683
CHK.			
APP.			SCALE / SHEET