

PLAN VIEW

UTILITY REQUIREMENTS

AIR REQUIREMENTS : 1.3 SCF/CYCLE @ 80 PSI (0.038m PER CYCLE @ 551.2 KPa)
 ELECTRICAL REQUIREMENTS : 460 VOLTS, 3 PHASE, 60 Hz STANDARD
 FULL LOAD AMPS - 10 AMPS
 DISCONNECT SIZE - 30 AMP

POWER REQUIREMENTS PROVIDED ARE FOR A BASE MACHINE AND CUSTOM OPTIONS MAY RESULT IN CHANGES.

MACHINE WEIGHT: APPROX. 2038 LBS. (926 Kg.)

SPEED CAPACITY: MAXIMUM 15 CASES PER MINUTE


CORRUGATED SIZE RANGE

ERECTED CASE SIZE


CASE	LENGTH	WIDTH	DEPTH	OPEN DEPTH
MINIMUM	8.00 (203)	5.50 (140)	3.00 (76)	5.75 (146)
MAXIMUM	20.00 (508)	14.00 (355)	14.00 (355)	19.00 (482)

KNOCKDOWN CASE SIZES (IN)

	KDL	KDW	FLAP
MINIMUM	13.50 (343)	8.50 (216)	2.75 (70)
MAXIMUM	32.00 (812)	26.00 (660)	7.00 (177)

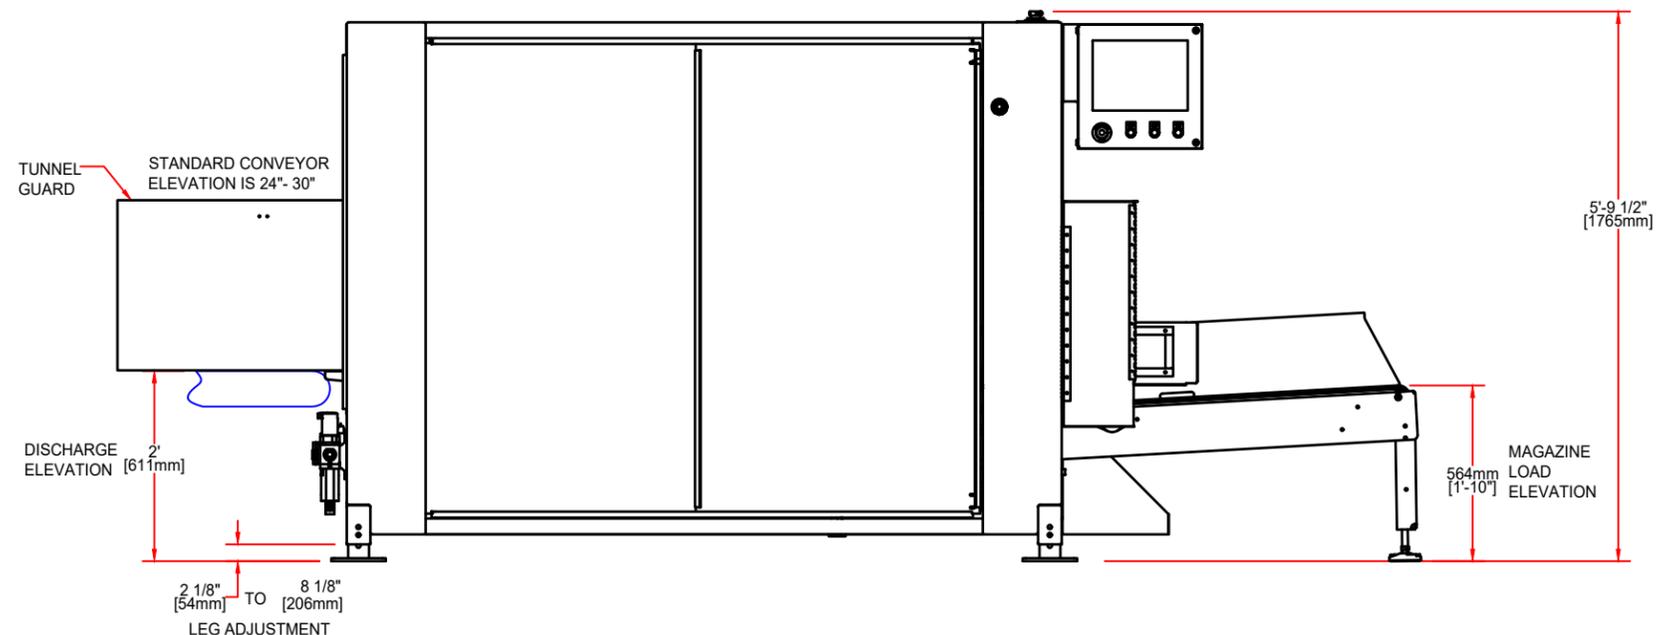

ELEVATION VIEW

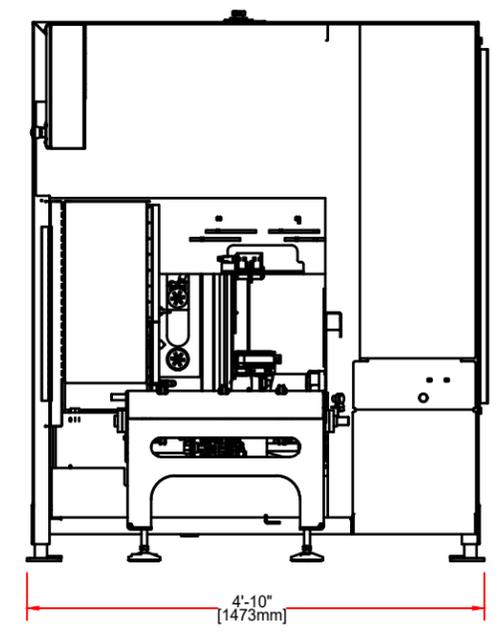

END VIEW

MACHINE SHOWN RUNS LH CASES

PRELIMINARY

ALL DIMENSIONS ARE APPROXIMATE AND MAY VARY WITH FINAL DESIGN

PROPRIETARY
 NEITHER THIS DOCUMENT NOR THE INFORMATION CONTAINED THEREIN MAY BE REPRODUCED OR DISCLOSED TO ANYONE WITHOUT THE WRITTEN PERMISSION OF R.A. PEARSON CO.

				2' - 2 7/16" 672		 <small>8120 WEST SUNSET HIGHWAY SPOKANE, WASHINGTON 99224 WWW.PEARSONPKG.COM</small>	
				DIMENSIONS ARE IN FOOT FRACTION INCH OVER MILLIMETERS.			
TITLE		2024CE15T-LH		DR. SJC		08/15/2023	
DWG NO.		PEARSON R&D		CHK:		1067538L	
DATE		REVISION		EON NO.		REV. BY	
				CHKD BY		APP:	
				SCALE		N.T.S.	
				SHEET		1	