

ERECTED CASE SIZE

CASE	LENGTH	WIDTH	DEPTH	OPEN DEPTH
MINIMUM	8.00in [203mm]	8.00in [203mm]	3.00in [76mm]	N/A
MAXIMUM	26.00in [660mm]	26.00in [660mm]	26.00in [660mm]	N/A



RANGE QUALIFICATIONS:

CASE CLOSED DEPTH RANGE VS. MACHINE SPEED:

- 30 CASES/MIN LIMITED TO 12in VERTICAL WITH 20in MAX LENGTH
- 30 CASES/MIN LIMITED TO 6in VERTICAL WITH 26in MAX LENGTH
- 25 CASES/MIN LIMITED TO 14in VERTICAL WITH 20in MAX LENGTH
- 25 CASES/MIN LIMITED TO 7.5in VERTICAL WITH 26in MAX LENGTH
- 20 CASES/MIN LIMITED TO 16in VERTICAL WITH 21.5in MAX LENGTH
- 20 CASES/MIN LIMITED TO 10in VERTICAL WITH 26in MAX LENGTH

- CASE LENGTH MUST BE EQUAL TO OR GREATER THAN CASE DEPTH

- CASE WEIGHT RANGE IS 5 LBS. MINIMUM TO 65 LBS. MAXIMUM (LIGHTWEIGHT OPTION: MIN 2 LBS)

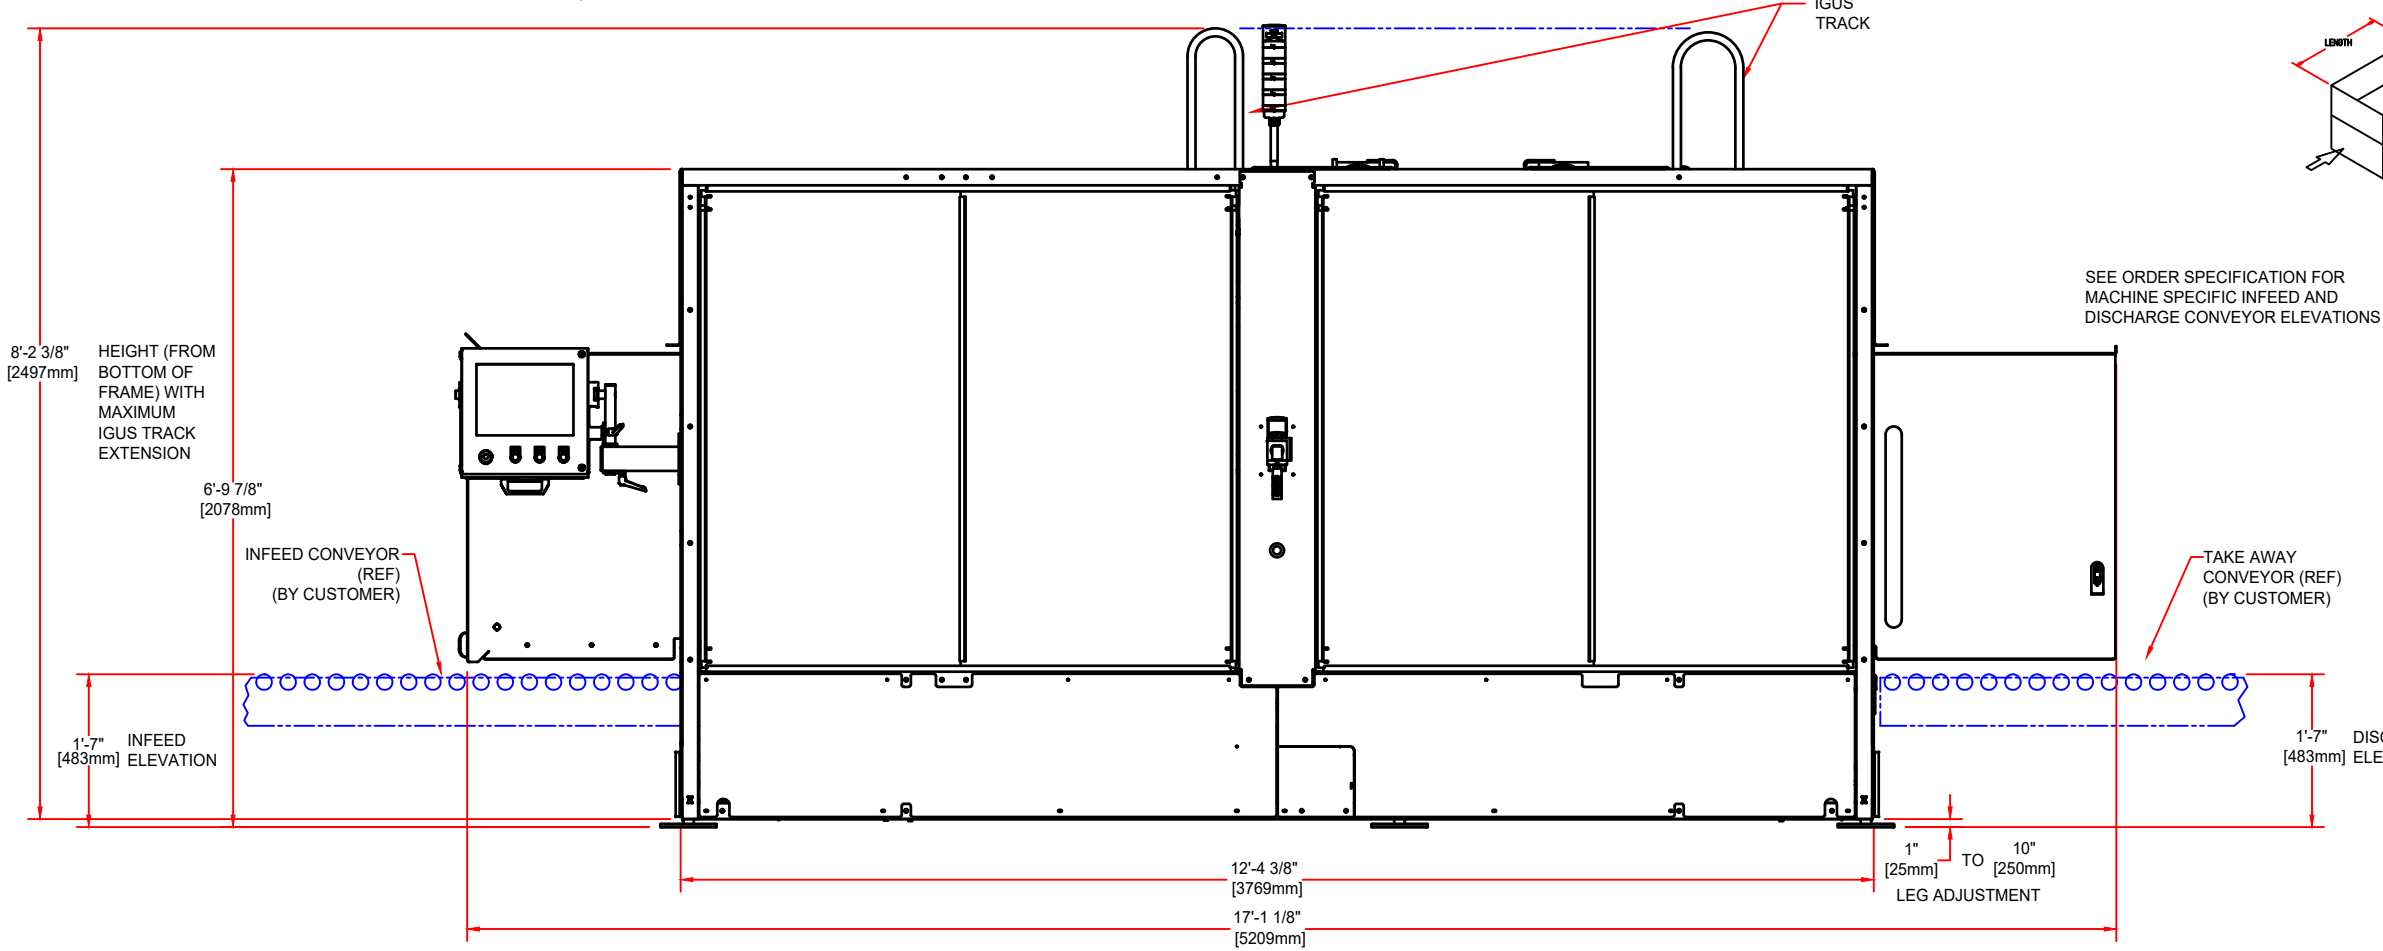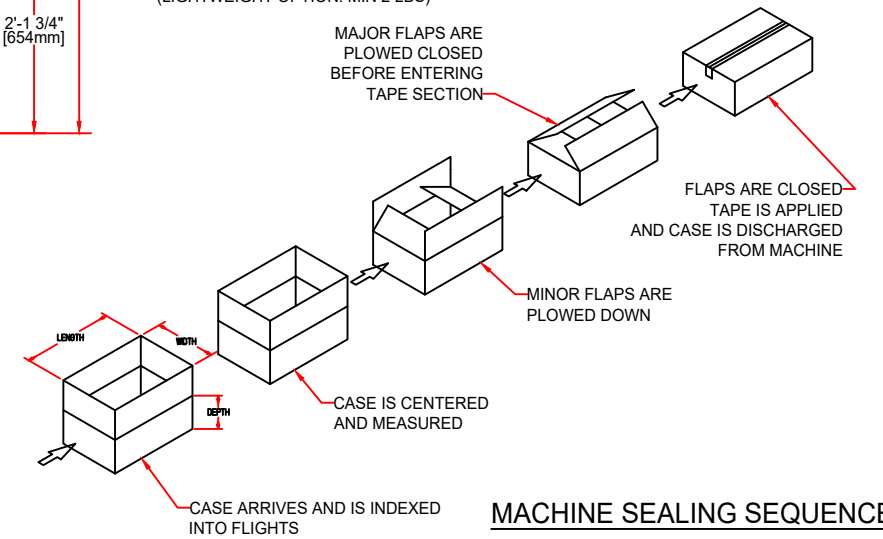

SEE ORDER SPECIFICATION FOR MACHINE SPECIFIC INFEED AND DISCHARGE CONVEYOR ELEVATIONS

UTILITY REQUIREMENTS

AIR REQUIREMENTS: .560 SCF/CYCLE @ 80 PSI (0.016 m³/CYCLE @ 551.2 KPa)

ELECTRICAL REQUIREMENTS: 460 VOLTS, 3 PHASE, 60 Hz STANDARD
FULL LOAD AMPS - 40.0 AMPS
DISCONNECT SIZE - 60 AMP

NOTE: UTILITIES INFO LISTED IS PRELIMINARY AND IS SUBJECT TO CHANGE WITH FINAL DESIGN

MACHINE WEIGHT APPROX. 4,700 LBS (2137 Kg.)

PRELIMINARY

(ALL DIMENSIONS ARE APPROXIMATE AND MAY VARY WITH FINAL DESIGN)

PROPRIETARY
NEITHER THIS DOCUMENT NOR THE INFORMATION CONTAINED THEREIN MAY BE REPRODUCED OR DISCLOSED TO ANYONE WITHOUT THE WRITTEN PERMISSION OF R.A. PEARSON CO.

DATE	REVISION	ECN NO.	REV BY	CHKD BY

2' - 2 7/16" 672				<small>8120 WEST SUNSET HIGHWAY SPOKANE, WASHINGTON 99224 WWW.PEARSONCO.COM</small>	
DIMENSIONS ARE IN FOOT FRACTION INCH OVER MILLIMETERS.		TITLE		CS30-RT SEALER, RH OP STATION	
DR.		DWG NO.	1037062R		
CHK.		SCALE			
APP.		SHEET			